

Impact S Counter Scale


Impact S

Description	Specifications – Impact S
Capacity x Division	30 x 0.01 lb or 15 x 0.005 lb or 15/30 x 0.005/0.01 lb or 6/15 x 0.002/0.005 kg
Weighing Modes	lb , kg, (single and dual interval)
Weight of Unit	23.5 lb (10.7 kg)
Shipping Weight	30 lb (13.7 kg)
Base Construction	Plastic upper shell with cast metal bottom
Operator Display	5.7" backlit Monochrome QVGA touchscreen display with tactile numeric keypad
Preset Keys	Up to 1440 preset keys
Customer Display	Monochrome 240 x 240 LCD
Printer	3" (72 mm) up to 5"/sec thermal - 6" roll capacity
Power	100-240 VAC, 50/60 Hz, 0.5A
Operating Temperature	0° C to 40° C, humidity, 5% to 95% non condensing
Storage Temperature	-20° C to 70° C with humidity from 5% to 95% non-condensing
Network Interface*	Ethernet 802-3 10/100 RF optional 802.11b/g
Memory	Minimum 64 Megabyte SDRAM
Mass Storage	Minimum 512 Megabyte Compact Flash
Available Serial port	External load cell
RJ13	External load cell power
USB Port	USB keyboard, mouse, USB flash drive, etc.

*Wireless network security supported

- WEP 40/64 & 104/128 bit
- WPA/PSK – TKIP
- WPA/PSK – AES
- WPA2/PSK – TKIP
- WPA2/PSK – AES-CCM

*PSK - Pre-Shared Key

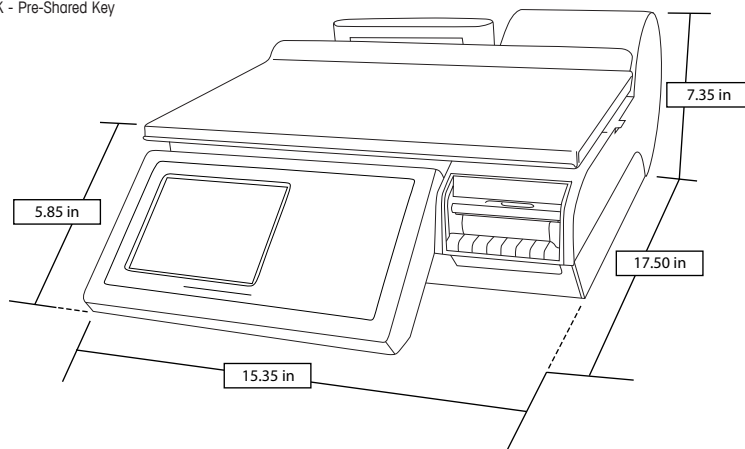

METTLER TOLEDO

Quality certificate ISO 9001
Environment certificate ISO 14001
Internet: <http://www.mt.com>
Worldwide service

Subject to technical changes
© 2012 Mettler-Toledo, LLC

RT1207.2E

