

Max connectivity, mini footprint easy integration for weighing



Weigh

For end-users, the IND131 and IND331 terminals deliver excellent accuracy, reliability and efficiency.




Comply

These superior weighing terminals feature the performance and reliability expected of instruments designed with Weights and Measures and product safety compliance in mind. They include features and functionality never before offered in such a compact and versatile form factor.




Control

The inherent qualities of process weighing terminals from METTLER TOLEDO make it easier for OEMs and system integrators to build best-in-class weighing systems cost-effectively.



Connect

Likewise, their easy integration into process-based network architectures provides valuable plant-floor information that can be used to optimize production and help reduce down-time.



Multiple PLC interfaces

All IND131 and IND331 terminals can be equipped with any of a wide array of PLC options.



IND131 and IND331 Weighing Terminals

The IND131 and IND331 scale terminals deliver precision measurement data in a single, cost-effective package. Each terminal features:

- Support for analog scale bases
- Ultra-fast A/D conversion rate and patented Trax-DSP™ digital filtering
- Crisp OLED (Organic LED) display readable in all light conditions
- Enclosures designed to match application environment – modular design enables multiple mounting possibilities
- Support for a wide variety of options, including DIO, additional COM port, and PLC interfaces
- Choice of AC or 24 VDC power supply
- Portable calibration and configuration settings, using SD memory card
- Scale calibration through PLC interface. CalFREE™ allows scales to be calibrated without test weights

METTLER TOLEDO

IND131 and IND331 Weighing Terminals

Technical Data

IND131/DIN



IND331/Panel



IND131/JBox



IND331/Harsh



Enclosure types		Unit of Measure	DIN rail-mount, plastic, with operator interface	Panel mount, stainless steel + plastic chassis	Stainless steel enclosure including internal board to sum load cells	Stainless steel desk- or wall-mountable enclosure, with operator interface
Dimensions	L x H x D	mm in.	68 x 138 x 111 2.7 x 5.4 x 4.4	Front panel: 168 x 68 x 12 6.6 x 2.7 x 0.5	251 x 261 x 123 9.9 x 10.3 x 4.8	220 x 131 x 177 8.7 x 5.2 x 7.0
Shipping weight		kg / lb	1 / 2.2	1.5 / 3.3	5.5 / 12.1	3 / 6.5
Environmental protection			IP20, Type 1	IP65, Type 4x and 12	IP69k	IP66
Ambient environment	Operation	°C / °F	-10 to 40 / 14 to 104, 10% to 90% relative humidity, non-condensing			
	Storage	°C / °F	-20 to 60 / -4 to 140, 10% to 90% relative humidity, non-condensing			
Power requirements	AC version	VAC / Hz / mA	85-264 / 49-61 / 27-73			
	DC version	VDC / mA	18-36; nominal 24 / 84-170; nominal 120 (IND131), nominal 130 (IND331)			
Display	Type		Green OLED including weight display, weight units, gross/net indication and graphic symbols for motion and center of zero. 10 updates/sec.			
	Character height	mm / in.	5.6 / 0.22	12 / 0.47	5.6 / 0.22 (internal)	12 / 0.47
Weight display			Maximum displayed resolution of 100,000 divisions			
Scale type			Analog load cells			
Number of cells			Up to 8 350 Ω load cells (AC version), up to 4 350 Ω load cells (DC version), 2 or 3 mV/V			
Number of scales			1			
Analog/Digital update rates		Hz	Internal analog: 366 / Target comparison: 50 / PLC Interface: 20			
Digital Filtering			TraxDSP®			
Memory			Stores two-speed target control values and limit values for three comparators			
Applications			Basic process weighing for gain-in-weight (filling), loss-in-weight (dosing) and level indication			
Load cell excitation voltage		VDC	5			
µV Build Minimum/Approved		microvolts	0.1 / 0.6			
Keypad			4 keys (Clear, Zero, Tare, Print); 1.22 mm thick polyester overlay (PET) with polycarbonate display lens			
Communications	Serial interfaces		Standard: One serial port (COM1), RS-232, 300 to 115,200 baud Optional: Serial port (COM2), RS-232/485, 300 to 115,200 baud			
	Protocol		Serial inputs: ASCII commands for CTPZ (Clear, Tare, Print, Zero), SICS (most commands, levels 0 and 1) Serial outputs: Continuous, Extended continuous, or Demand (limited formats)			
Approvals	Weights and Measures		USA: NTEP Class III/IIIL - 10,000d; CoC 09-051 Canada: Class III/IIILD - n max. 10000/20000; AM-5744		Europe: OIML, Class III, 6000e; R76/2006-NL1-09.26	
	MID		OIML R51 (Automatic Catchweighing) T10262; OIML R61 (Automatic Gravimetric Weighing) T10261			
	Product Safety		UL, cUL, CE			

Options

COM2 / DIO, includes:	COM2 RS-232/485 serial	
	4 discrete outputs, solid state or relay	Modbus RTU capability
Programmable Logic Control (PLC) interfaces	2 discrete inputs (selectable active or passive)	
	4-20mA Analog Output	Ethernet/IP™ DeviceNet™
	PROFIBUS® DP	Modbus TCP
	Allen-Bradley RIO™	ControlNet™ (24 VDC units only)

Note: Explicit messaging not supported in IND131 and IND331 PLC interfaces.

Upgrade to IND560 or IND780 for this capability.



IND331 with PTPN adapter plate

Accessories

Wall mounting bracket (for IND331 Harsh unit)	PTPN Terminal adapter plate for IND331 Panel unit
Swivel mounting bracket (for IND331 Harsh unit)	2GB SD Memory Card

IND131 and IND331 Packaged Solutions

Enhanced Terminals in Robust Enclosures

- IND131 and IND331 in enclosures configured with optional COM2/DIO and optional PLC interface
- Packages include AC terminal/s or terminal/s with DC power supply



Enclosure Specifications

Fiberglass, painted mild steel (shown at left) or stainless steel enclosures (at right) can be used, depending on the installation environment. Each enclosure type includes integrated mounting brackets, and for the DC-powered terminals, an internal 24 VDC power supply can be added.



Enclosure material	Fiberglass	Painted Mild Steel	Type 304 Brushed Stainless Steel
Environmental rating	NEMA 4/4x/12/13	4/12	3R/4/4x/12/13
	IP 66	66	66
Approvals	UL, cUL	UL, cUL	UL, cUL

Customized Interfaces

Configure the packaged IND131 and IND331 terminals for specific applications with convenient operators for I/O, such as annunciators and pushbuttons. This makes operator interactions even easier, more consistent and safer.




Multiple Terminal Installations

Reduce both mounting space and cabling runs by combining multiple terminals into one enclosure. Each terminal can be configured for the exact application required, including DC power supply and optional second serial port with DIO and PLC interface.



Direct High Voltage Control

Using the dry contact relay option, the IND131 and IND331 terminals can provide high voltage control signals directly to devices such as ball valves and vibratory feeders. Select latched or coincidence targets in combination with user-defined limit values for up to three comparators, to create a time-saving and cost-effective basic process controller.

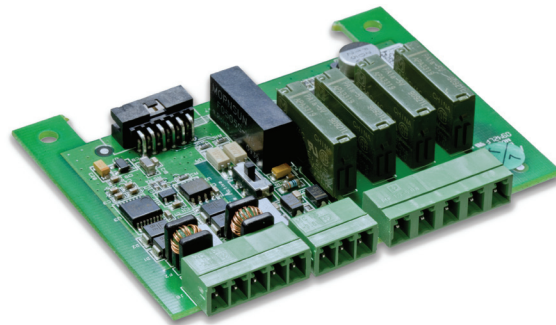

Mettler-Toledo, Inc.
900 Polaris Parkway
Columbus, OH 43240
Tel. 800-METTLER / 614-438-4511
Fax 614-438-4900
Subject to technical changes
INDB0071.E7
©04/2011 Mettler-Toledo, Inc.

METTLER TOLEDO Service

Essential Services for Dependable Performance
METTLER TOLEDO is uniquely qualified to provide the installation, calibration and maintenance services essential to ensuring accuracy, optimizing uptime and prolonging equipment life. Our service representatives will be there at the right time, with the right parts, the right tools and the right skills to meet your needs.

www.mt.com for more information