

## Construction per size



**A** 240 x 300 mm / 9.5" x 11.8"  
**QA** 229 x 229 mm / 9" x 9"

### Standard Stand

330 mm / 13"  
 330 mm / 13"




**BB** 300 x 400 mm / 11.8" x 15.7"  
**B** 400 x 500 mm / 15.7" x 19.7"  
**QB** 305 x 305 mm / 12" x 12"  
**QC** 457 x 457 mm / 18" x 18"

330 mm / 13"  
 660 mm / 26"  
 330 mm / 13"  
 660 mm / 26"

## Accessories

	Order number
<b>Stand, stainless steel</b>	
Heights 120 mm / 4.7"	72 229 393
Heights 330 mm / 13"	72 198 702
Heights 660 mm / 26"	72 198 703
Heights 900 mm / 35.4"	72 198 704
<b>Tower mount</b>	
For IND226 – stainless steel	22 015 188
<b>Wall mounting</b>	
For IND226 – stainless steel	72 188 182



# Bench Scale



### BBA226 Bench Scale

- Stainless steel construction
- Capacities from 3 to 150 kg
- OIML and NTEP approved
- Easy operation, low maintenance
- Large LED Display

**Durable, reliable, economical**  
 for your demanding applications

[www.mt.com](http://www.mt.com)

For more information

**Mettler-Toledo, Inc.**  
 1900 Polaris Parkway  
 Columbus, OH, 43240  
 Tel. (1) 800 786 0038 / (1) 614 438 4511  
 Fax (1) 614 438 4900

Subject to technical changes  
 © 04/2010 Mettler-Toledo AG  
 Printed in Switzerland  
 MTSI 72243271

**ServiceXXL**  
 Tailored Services



**METTLER TOLEDO**

## The economical solution for challenging industrial environments

The BBA226-4 stainless steel scale is a robust, rugged and cost effective multi functional scale for any industrial environment with light hose down requirements. It is designed for a wide range of weighing tasks from out-of-the-box simple weighing to over/under checkweighing, classifying and counting.

The terminal with its large LED display is fast, and easy to operate. It features a RS232 interface to communicate with a printer or PC and is packed in a stylish and functional designed stainless steel enclosure.



### Simple and easy operation

The IP65/IP67 protected terminal of the BBA226 is easy to operate. Only six keys provide simple and intuitive operation with On/Off, Zero, Tare, Function, Clear, and Print. Straightforward setup of different functions requires minimal operator training.




### Good readability

The BBA226 features a large, high contrast LED display providing clear readability.



### Over/under checkweighing

The BBA226 features an over/under indication for simple checkweighing applications.

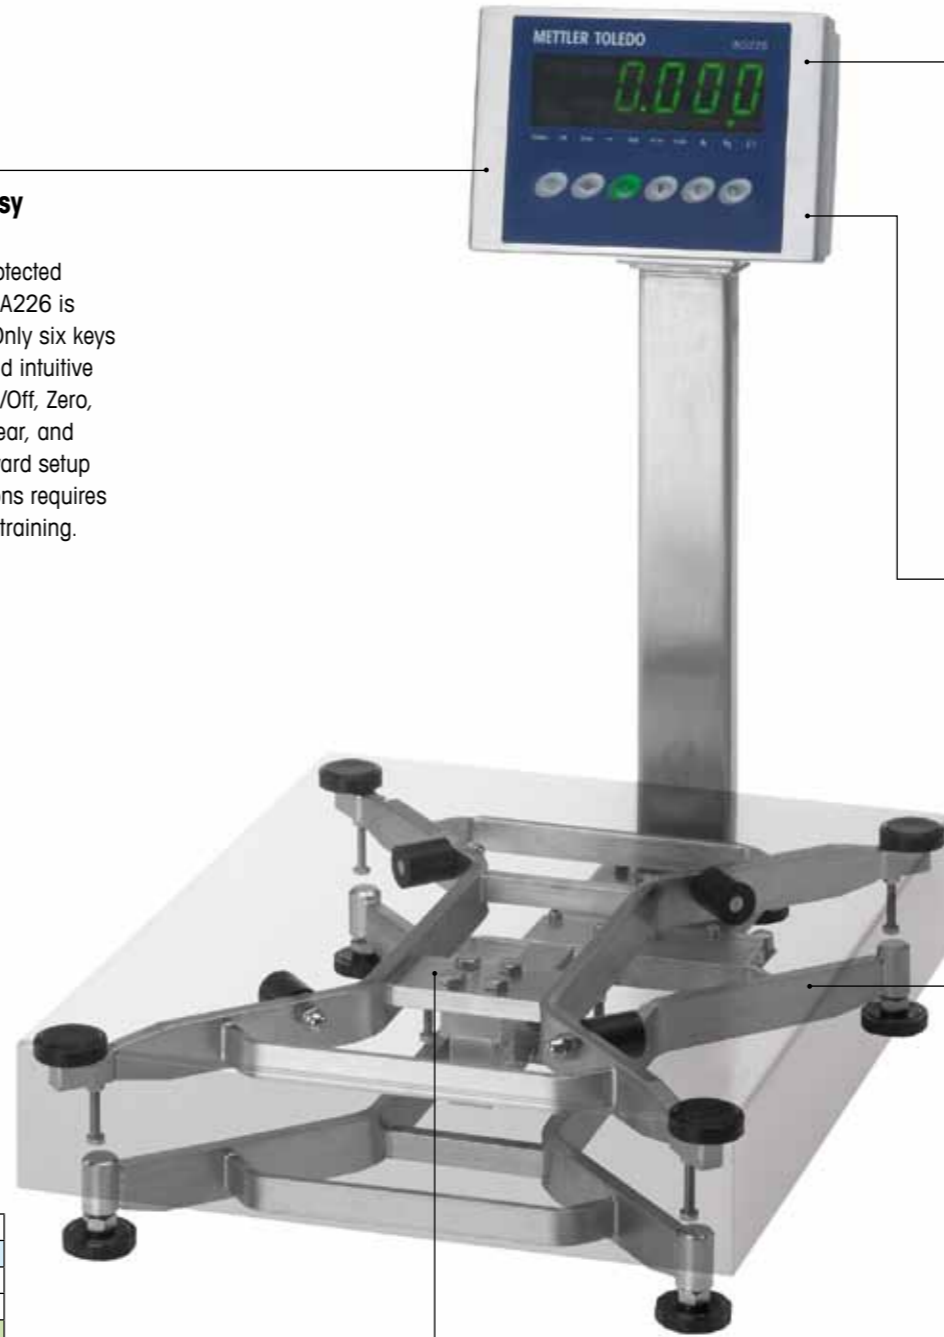

### For light hose down

The BBA226-4 Bench Scale is suitable for light hose down applications.



### Easy to clean

The open, sturdy and straight forward platform design allows for efficient cleaning due to good access to any part of the construction. (for construction per size, see page 4)

## Technical specifications

<b>Display</b>	6-digit, 7-segment LED, Heights: 30 mm/1.2", Stabilization time <1s,	<b>Ingress Protection</b>	Terminal: IP65/IP67 Platform/Load cell: *IP65
<b>Resolution certified</b>	OIML Class III, 3000e / NTEP 5000d	<b>Material</b>	Terminal Housing: Stainless steel AISI304 Platform Frame: Stainless steel AISI304 Load Plate: Stainless steel AISI304 Column: Stainless steel AISI304
<b>Resolution uncertified</b>	15000d	<b>Load Cell</b>	Aluminium, Potted
<b>Internal Resolution</b>	1/500000	<b>Applications/Features</b>	Straight weighing, over/under checkweighing, classifying, counting, x10, unit switch kg/lb
<b>Power Supply</b>	100...240VAC, 50/60Hz		

\* Option: Potted stainless steel load cell (IP65/IP67) for light wash down applications (order BBA226-6)

## Standard configurations

Model	Platform size	Max. weighing capacity					
		Rectangular weighing platforms					
BBA226-4A	240 x 300 mm / 9.5" x 11.8"	3 kg / 5 lb	6 kg / 10 lb	15 kg / 25 lb			
BBA226-4BB	300 x 400 mm / 11.8" x 15.7"				30 kg / 50 lb	60 kg / 100 lb	
BBA226-4B	400 x 500 mm / 15.7" x 19.7"				30 kg / 50 lb	60 kg / 100 lb	150 kg / 250 lb*
Certifiable resolution 1x3000e / 1x5000d							
Readability certified		1 g / 0.001 lb	2 g / 0.002 lb	5 g / 0.005 lb	10 g / 0.01 lb	20 g / 0.02 lb	50 g / 0.05 lb
Min. capacity (legal for trade only)		20 g / 0.02 lb	40 g / 0.04 lb	100 g / 0.1 lb	200 g / 0.2 lb	400 g / 0.4 lb	1 kg / 1 lb
Square weighing platforms							
BBA226-4QA	229 x 229 mm / 9" x 9"	3 kg / 5 lb	6 kg / 10 lb				
BBA226-4QB	305 x 305 mm / 12" x 12"			15 kg / 25 lb	30 kg / 50 lb	60 kg / 100 lb	
BBA226-4QC	457 x 457 mm / 18" x 18"					60 kg / 100 lb*	150 kg / 250 lb*
Certifiable resolution 1x3000e / 1x5000d							
Readability certified		1 g / 0.001 lb	2 g / 0.002 lb	5 g / 0.005 lb	10 g / 0.01 lb	20 g / 0.02 lb	50 g / 0.05 lb
Min. capacity (legal for trade only)		20 g / 0.02 lb	40 g / 0.04 lb	100 g / 0.1 lb	200 g / 0.2 lb	400 g / 0.4 lb	1 kg / 1 lb

Model designation example: Size 240 x 300 mm / 6kg: BBA226-4A6  
 Zero setting range = 2% of max. capacity  
 Temperature range = -10°C to +40°C / 14°F to 104°F  
 Preload range = 18% of max. capacity  
 Taring range subtractive from 0 to max. capacity

\* Not available with potted stainless steel load cell