

# Application Versatility

## For General-Purpose Transaction Weighing




### Multiple applications

For maximum flexibility, the terminal adds five selectable transaction weighing applications to its simple weighing capability. A vivid graphic display, easy set-up and intuitive on-screen prompting increase productivity through reduced operator training.




### Power options

Choose from universal AC power or battery version. The long-life externally chargeable NiMH battery provides ultimate portability. The compact battery can power the system for up to 30 hours between charges. An external charger is required.

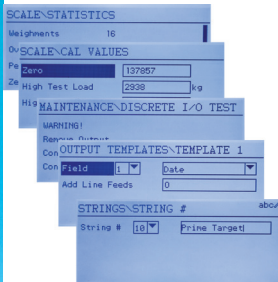

### Utilities

User-friendly utilities include print templates with customizable text strings, report view and print, maintenance diagnostics and statistics, password protection and a PC-based file transfer tool.



### Connectivity

Two available option slots enable a broad range of connectivity interfaces. Use serial, USB or Ethernet connections to exchange application transaction data and ID files using the PC-based file transfer tool.



### IND246 Terminal Productivity by Design

For simple weighing or for specific basic level applications like over/under checkweighing, inbound/outbound vehicle weighing, peak weight measurement, animal weighing and counting, this terminal provides best-in-class flexibility, performance and operator interface. The terminal includes a large backlit graphic LCD display, an operator-friendly keypad layout with function, alphanumeric and navigation keys, support for SD memory card and application-specific print templates. These characteristics make it the most versatile general purpose transaction weighing terminal available.



- 100 - 240 VAC power, or NiMH battery model
- Alphanumeric keypad for quick entry of tare and ID information
- Large, back-lit graphic LCD display, readable under varying light conditions
- Automatic shutoff and backlight timeout features help extend battery life
- Isolated COM1 and optional COM2 ports
- Control of external devices using Discrete I/O
- PC-based File Transfer Tool (FTT) to exchange ID and target tables between terminal and PC

## IND246

### Application Versatility Meets Operator Productivity

#### Application Pacs

- Five applications ready for use:
  - ◆ Animal Weighing: Generates average weight for one animal, or average weight-per-animal for multiples
  - ◆ Counting: Prompts operator through piece counting sequence to help reduce operator errors. Includes accumulation by part ID
  - ◆ Checkweighing: Over/Under operation with clear on-screen status display, can control status lights
  - ◆ Peak Weight Measurement: Displays the peak weight from the current weighing cycle, or maximum, minimum and average peak weight from a multi-sample weighing cycle
  - ◆ Vehicle Weighing: Permanent or Temporary ID weighing for one- and two-pass operation

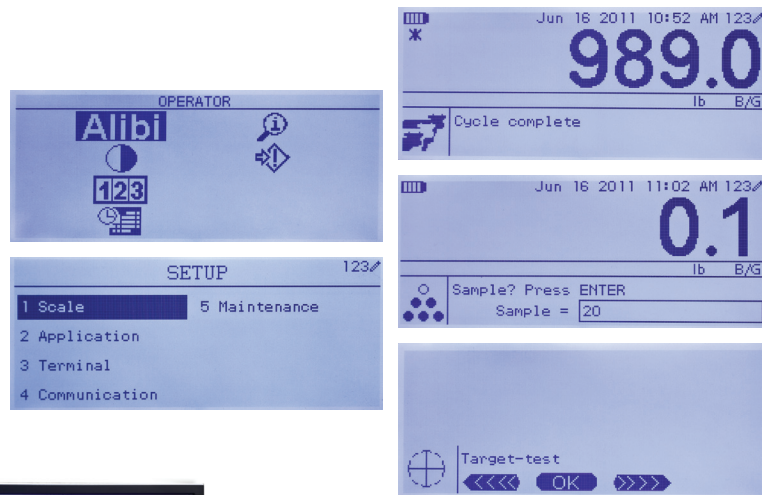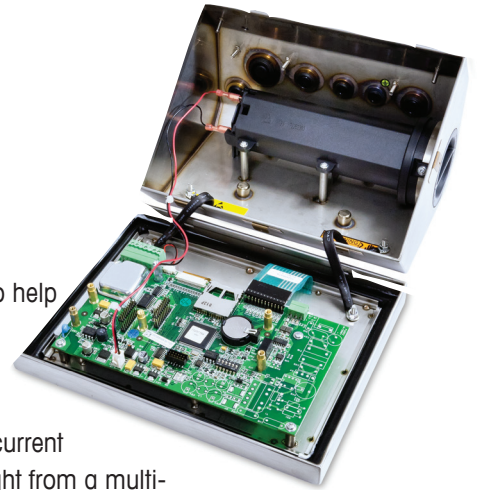

## Technical Data

<b>Dimensions (WxHxD)</b>	Without bracket: 230 x 146 x 165 mm / 9" x 5.75" x 6.5" With bracket: 230 x 165 x 195 / 9" x 6.5" x 7.7"		
<b>Construction</b>	Stainless Steel		
<b>Power</b>	AC: 100 - 240 VAC Battery: NiMH, removable, externally charged. 1 load cell - 25 hours; 4 load cells - 20 hours. External charger optional		
<b>Mounting</b>	Fixed-position bracket included		
<b>Operating Environment</b>	-10°C to +40°C (14°F to 104°F), 10% to 95% relative humidity, non-condensing		
<b>Protection</b>	IP66		
<b>Display</b>	Transflective backlit graphic LCD, 240 x 96 pixels Weight display: Standard mode, 1.1"/27 mm high. Application mode, 0.8"/20 mm high		
<b>Scale Interface</b>	Analog load cell		
<b>Units of Measure</b>	g, kg, lb, oz, t, ton		
<b>Load Cells</b>	AC version	Up to 10 350 Ω load cells, 10V Excitation	
	Battery version	Up to 4 350 Ω load cells, 5V Excitation	
<b>Keypad</b>	8 function keys, 4 navigation keys, 12-key alphanumeric keypad, On/Off button		
<b>Memory</b>	Battery-backed internal		
<b>Applications</b>	Animal Weighing	User-defined sampling period; 1-9.9 seconds. ID input and display Display modes for average total weight and average weight-per-animal for single or multiple animals	
	Counting	Two counting sequences: Tare-Sample (APW) and Sample-Tare; accumulation by part ID	
	Checkweighing	3 Zones, up to 25 targets; SmartTrac® graphical representation – small or large	
	Peak Weight	Single or multi-cycle mode selection. Multi-cycle mode shows maximum, minimum and average peak weight; Control of external devices via optional discrete I/O; Memory report view and print	
	Vehicle Weighing	Storage of 99 permanent tares and 99 temporary tares by ID; Auto-assignment of ID; totalization by Permanent ID; 4,000 stored transactions	
<b>Communication Options</b>	Standard	COM1	RS-232, isolated
	Option Slot 1	COM2	RS-232/485, isolated
		COM2 + D I/O	RS-232/485, isolated + 2 inputs and 4 outputs
		USB	Device type*
		USB + D I/O	Device type* + 2 inputs and 4 outputs
		* Only for connection to PC	
	Option Slot 2	Ethernet TCP/IP, 10/100 Base-T	
<b>Approvals</b>	Weights & Measures	OIML: Class III 6000e, Class IIII 1000e, R76/2006-NL1-11.12 Europe: Class III 6000e, Class IIII 1000e, TC7918 USA: NTEP III, IIII – 10,000d/2x5000d; CoC 11-040; Canada: III, IIIHD - n max 10,000/20,000; AM-5819	
	Product Safety	UL, cUL, CE	

## Accessories

Tilt/Swivel Bracket

NiMH Battery Pack

Battery Pack Charger



### Mettler-Toledo, LLC

1900 Polaris Parkway  
Columbus, OH 43240  
Phone 800 438 4511  
Fax 614 438 4900

Subject to technical changes  
© 04/2014 Mettler-Toledo, LLC  
INDB0084.EN.03 A4

[www.mt.com/IND246](http://www.mt.com/IND246)

For more information