


# bPro Counter Scale

## bPro

| Description           | Specifications – bPro-T2  |
|-----------------------|---|
| Capacity x Division   | 6 x 0.002 kg / 15 x 0.005 kg<br>15 x 0.005 lb / 30 x 0.01 lb                        |
| Weighing Modes        | lb , kg, (single and dual interval)   |
| Weight of Unit        | 23.0 lb (10.5 kg)   |
| Shipping Weight       | 24.9 lb (11.3 kg)   |
| Base Construction     | Aluminum die cast   |
| Operator Display      | Backlit monochrome 240 x 240 LCD  |
| Operator Keyboard     | 98 key tactile keypad with rubber overlay   |
| Customer Display      | Backlit monochrome 240 x 240 LCD  |
| Printer               | 2.2" (56mm) max width labels<br>up to 4.5" (115mm)/sec - 5" roll capacity           |
| Power                 | 100-240 VAC, 50/60 Hz, 1.0A   |
| Operating Temperature | 0° C to 40° C, humidity, 5% to 95% non condensing                                   |
| Storage Temperature   | -20° C to 70° C with humidity from 5% to 95% non-condensing                         |
| Network Interface*    | Ethernet Standard 10 MBPS<br>RF optional 802.11b/g RF<br>RS-232 Host Communications |
| Storage Memory        | 4 Megabytes RAM   |
| Optional Storage      | 8 Megabyte expansion  |
| Available Serial port | Two   |



- \*Wireless network security supported
- WEP 40/64 & 104/128 bit
  - WPA/PSK – TKIP
  - WPA/PSK – AES
  - WPA2/PSK – TKIP
  - WPA2/PSK – AES-CCM
- \*PSK - Pre-Shared Key

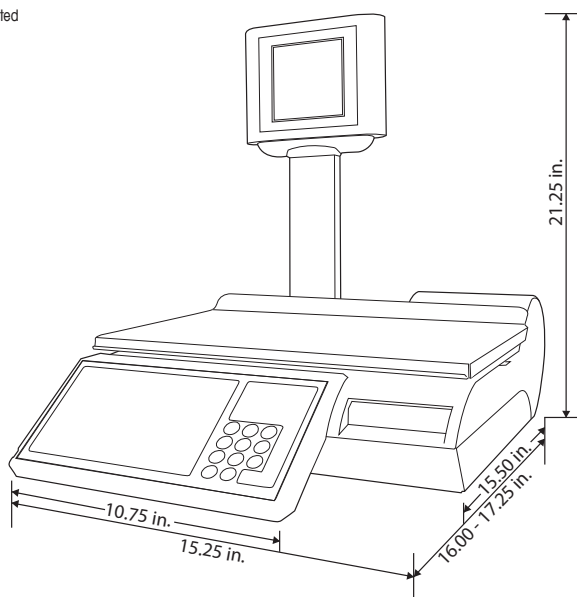

**METTLER TOLEDO**

Quality certificate ISO9001  
Environment certificate ISO14001  
Internet: <http://www.mt.com>  
Worldwide service

Subject to technical changes  
©2014 Mettler-Toledo, LLC

RT1210.1E