

The Perfect Fit Boost Sales



Flexible Configuration

The FreshWay V's modular design supports many different configurations for a range of retail applications and environments. The weighing platter and display screens can be positioned completely separately, enabling custom setup for various counter heights and orientations.



Ergonomic Operation

Employees can adjust the height and tilt angle (up to 30°) of the FreshWay V's touchscreen display to suit their individual requirements. This ensures ergonomic operation as well as fast, error-free weighing processes.



Durable Housing

Impact-resistant aluminum housing with a non-stick surface protects the FreshWay V scale against spills, acids, salts, and fats. This makes it ideal for long-term usage, even in highly-demanding retail conditions.



Intuitive Software

The user interface of the FreshWay V offers simplified operation with scale software that is user-friendly for both new employees and experienced operators. Less training time means lower costs and more time for high-quality customer service.



FreshWay V

The modular design of the FreshWay V scale features individual, freely-positionable components for configuration to a variety of retail counter setups. Retailers benefit from this high degree of flexibility when modifying service counters to sales requirements.

The versatile, innovative design of the FreshWay V permanently reduces the risk of high follow-up setup costs and ensures adaptability for any changing future needs and requirements.

Technical Data

FreshWay V

Operator Touchscreen Display

- 12.1" (30.7 cm) capacitive touchscreen with a bright, high-contrast TFT LED backlit display
 - Screen resolution: 1024 x 768 pixels
- Continuous tilt angle adjustments (stepless)
- Optional 15.6" (39.6 cm) display available
 - Screen resolution: 1366 x 768 pixels
- Cable length: 1.4 m; optional 2 m, 4 m

Customer Display (Optional)

- 12.1" (30.7 cm) customer display with bright, high-contrast LED backlight technology
 - Screen resolution: 1024 x 768 pixels
- 15.6" (39.6 cm) customer display with a bright, high-contrast TFT LED backlit display
 - Screen resolution: 1366 x 768 pixels
- Cable length: 1.4 m; optional 2 m, 4 m

Printers

- Printing width: 2.2" (56 mm)
- Paper width: 1.7 – 2.4" (44 – 62 mm)
- Printing speed: up to 5.9"/sec (150 mm/sec)
- Print resolution: 8 dots/mm
- Separate paper feed button
- Pole-mounted printer options:
 - 2-inch (50.8 mm) ticket printer
 - 2-inch (50.8 mm) label printer
 - 2-inch (50.8 mm) linerless printer
 - 3-inch (76.2 mm) linerless printer
- Optional remote-mounted (up to 4 m) printers:
 - 3-inch (76.2 mm) label printer
 - 3-inch (76.2 mm) linerless printer
- Dual printer capability
- Cable length: 1.4 m; optional 2 m, 4 m

Processor

- Intel® processor

Data Storage

- Up to 8 GB RAM
- Up to 128 GB Flash

Operating System

- Microsoft Windows®

Scale Software

- UC3 application
- VCO application

Power Supply

- 100 – 240 V AC, 50 / 60 Hz

Average Power Consumption

- During operation: ca. 26 W

Interfaces and Protocols

- Gigabit Ethernet interface (10/100/1000)
- 1 x RJ11 interface for controlling the cash register drawer
- 2 x USB 2.0 ports
- 2 x USB 3.0 ports
- Integrated solution for wireless data transmission in accordance with IEEE 802.11 ac/a/b/g/n (2T2R), with 2 x 2 MIMO


Housing

- Impact-resistant housing made of die-cast aluminum
- Color: Black

Weighing range	3 kg / 6 kg*	6 kg / 15 kg*	3 kg / 6 kg / 15 kg	TRM
Graduation	1 g / 2 g	2 g / 5 g	1 g / 2 g / 5 g	-
Minimum load	20 g	40 g	20 g	-

*Optional with Inclination Compensation

Intel is a registered trademark of Intel Corporation in the U.S. and/or other countries. Microsoft® and Windows® are registered trademarks of Microsoft Corporation in the United States and/or other countries.

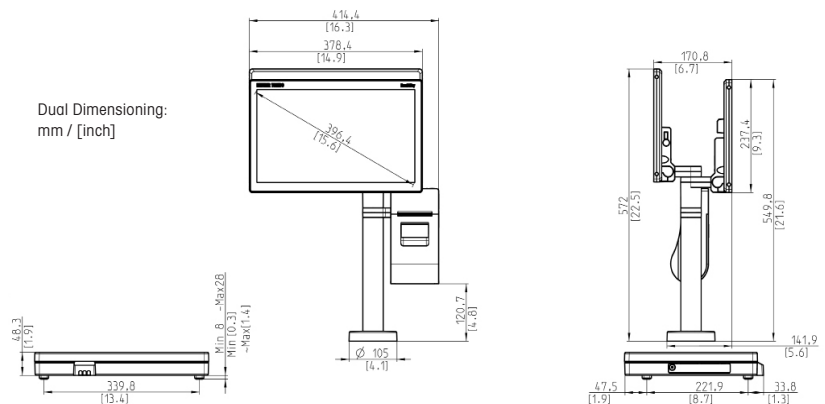

www.mt.com

For more information



METTLER TOLEDO Group

Retail Division

Local contact: www.mt.com/contacts

Subject to technical changes

©12/2021 METTLER TOLEDO. All rights reserved

Document No. 30536838 A

MarCom Industrial