

Baseline HD



Heavy Duty Analog


Bench/Floor Scale



Robust Scale Bases for Harsh Environments and System Integration


METTLER TOLEDO

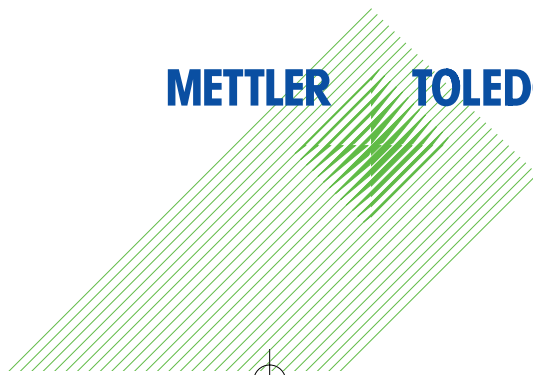



METTLER TOLEDO Baseline HD Analog Bench/Floor Scale

Rugged Tube Steel Construction in Mild or Stainless Steel

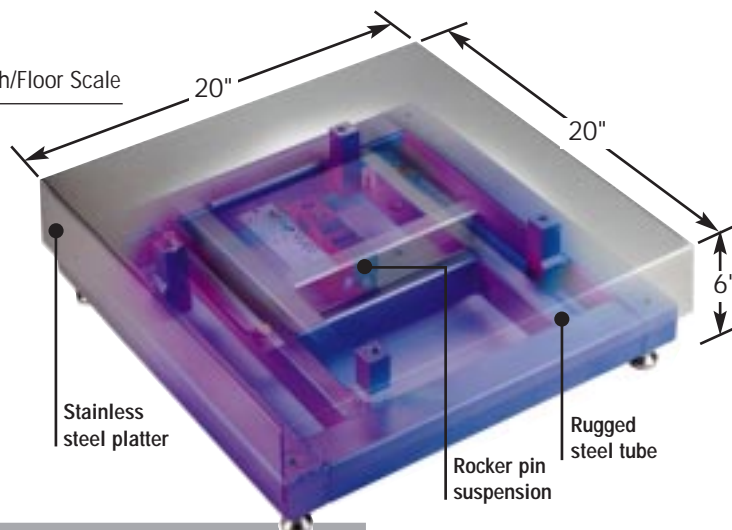

- Stainless steel hermetically sealed load cell offers highest protection.
- Analog load cell allows upgrade of existing scale base without changing scale instrument.
- Enhanced resolution displays up to 1 part in 20,000 resolution in non-trade applications.
- Custom mounting plates...use same scale base for different applications.
- Approved for use in hazardous areas

Robust HD Bench/Floor Scale

Bases are available in either mild steel or stainless steel construction. The proven analog load cell is the same load cell used in METTLER TOLEDO's premium VERTEX® floor scales. The load cell is hermetically sealed* for optimum protection. Both versions are built for harsh, rugged environments. They can



withstand shock and overload up to 300% of capacity.

Customize Your Scale

An Optional Custom Mounting Plate is available to adapt the unit to your application. Mount conveyors, hoppers, mixers, small tanks, reactors, or other equipment. We will customize the mounting plate size, drill and pre-tap holes, or add mounting blocks in the factory to your specifications.

HD Bench/Portable Floor Scales are designed to meet the demanding needs of pharmaceutical, food, chemical or similar hostile, corrosive environments.

HD Specifications

Model	HD050*	HD100	HD250	HD500
Capacity	100 lb 50 kg	250 lb 100 kg	500 lb 250 kg	1000 lb 500 kg
Standard division size	0.02 lb 0.01 kg	0.05 lb 0.02 kg	0.1 lb 0.05 kg	0.2 lb 0.1 kg
Platform size	20 x 20 in 508 x 508 mm	20 x 20 in 508 x 508 mm	20 x 20 in 508 x 508 mm	24 x 30 in 610 x 760 mm
Max. back weight	50 lb	125 lb	400 lb	900 lb
Construction	Painted steel or 100% 304 stainless steel			
Top platter	Stainless steel platter standard / custom mounting plate optional			
Shipping weight	140 lb	140 lb	R 140 lb L 230 lb	L 230 lb
Operating temperature	-10°C to 40°C (14°F to 104°F)			
Load cell type	Stainless steel analog – single 350 ohm load cell			
Suspension	Rocker pin assembly			
L/C cable length	15' standard / 30' optional			
Compatible METTLER TOLEDO Instruments	HAWK™, PANTHER®, LYNX®, JAGUAR®, PUMA®, LYNXBATCH®, SC counting scale with analog second scale kit			
Approvals	NTEP COC #99-013, Measurement Canada Approved			

*HD050 utilizes an environmentally sealed load cell with protective potted compound.

Options

- 19" and 39" columns
- Accessory mild steel or stainless steel mounting plate. Rugged 1/2" mounting plate to easily attach conveyors, hoppers, or other accessories.



	TEL	FAX	TEL	FAX	
METTLER TOLEDO	Australia (61) 3 9644 5700	(61) 3 9645 3935	Malaysia (60-3) 703 2773	(60-3) 703 8773	Internet www.na.mt.com www.mt.com
	Austria (43-1) 604 1980	(43-1) 604 2880	Mexico (52-5) 547 5700	(52-5) 541 2228	
USA & Canada	Belgium (32-2) 334 0211	(32-2) 378 1665	Netherlands (31-344) 638363	(31-344) 638390	Specifications subject to change without notice. © 1999 Mettler-Toledo, Inc. METTLER TOLEDO® is a registered trademark of Mettler-Toledo, Inc. Printed on recycled paper and is recyclable. Printed in USA.
1900 Polaris Parkway Columbus, Ohio 43240	Brazil (55-11) 421 5737	(55-11) 7295-1692	Norway (47-22) 30 44 90	(47-22) 32 70 02	
TEL (800) 786-0038 (614) 438-4511	China (Industrial) (86-519) 6642040	(86-519) 6641991	Poland (48-22) 651 9232	(48-22) 42 20 01	
FAX (614) 438-4900	China (Systems) (86-21) 6485-0435	(86-21) 6485-3351	Russia (7-095) 921 9211	(7-095) 921 6353	
Headquarters	Croatia (385-1) 660 3009	(385-1) 660 2189*	Singapore (65) 778 6779	(65) 778 6639	
8606 Greifensee Switzerland	Czech Republic (420-2) 254962	(420-2) 24247583	Slovak Republic (421-7) 525 2170	(421-7) 525 2173	
TEL (41-1) 944 22 11 FAX (41-1) 944 30 60	Denmark (45-43) 27 08 00	(45-43) 27 08 28	Slovenia (38-6) 6123-57 64	(38-6) 6127-4575*	
	France (33-1) 30 97 17 17	(33-1) 30 97 16 16	Spain (34-3) 223 2222	(34-3) 223 0271	
	Germany (49-641) 50 70	(49-641) 52951	Sweden (46-8) 702 50 00	(46-8) 642 45 62	
	Hungary (36) 1257 7030	(36) 1256 2175	Switzerland (41-1) 944 45 45	(41-1) 944 45 10	
	India (91-22) 857 08 08	(91-22) 857 50 71	Taiwan (886-2) 579-5955	(886-2) 579-5977	
	Italy (39-2) 333321	(39-2) 356-2973	Thailand (66-2) 719 6480	(66-2) 719 6479	
	Japan (81-6) 949-5901	(81-6) 949-5944	United Kingdom (44-116) 235 7070	(44-116) 236 6399	
	Korea (82-2) 518-2004	(82-2) 518-0813		*Ask for FAX.	

